



JOSE

25-11-19

CONDUIT ENTRY HOLE				
Hole	Metric	NPT		
Α	M32	1 1/4"		
В	M25	3/4"		
С	M20	3/4"		

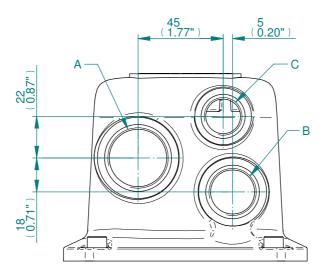

CONDUIT ENTRIES

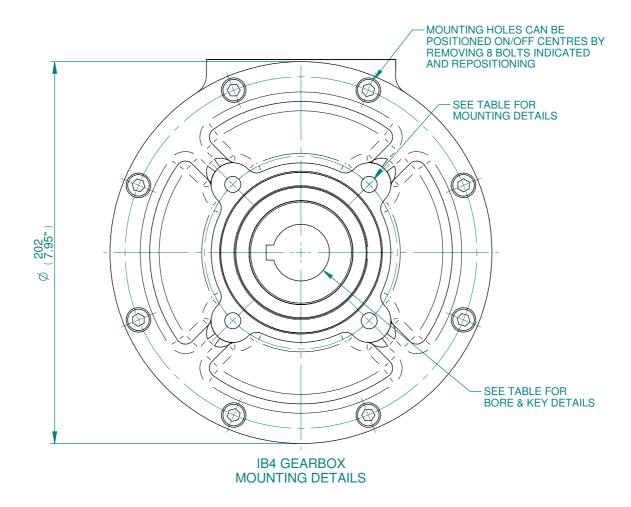

MAX. STEM SCREW ACCEPTANCE DIA

45 (1.75")

	MAX BORE SQ KEY		MAX BORE RECTANGULAR KEY	
STD	BORE	KEY	BORE	KEY
BS4235	-	-	40.0	12x8
BS46	1.500"	3/8" SQ	1.625"	7/16"x5/16"
ANSI B17.1	1.500"	3/8" SQ	1.625"	3/8"x1/4"

BASEPLATE DETAILS					
TYPE	BASEPLATE	SPIGOT DIA.	HOLE DETAILS (45° OFF		
ISO F10	STANDARD	Ø69.95-0.05	4 HOLES M10x15 (0.59") DEEP		
130 F10		(Ø2.754"-0.002")	ON Ø102.0 (Ø4.02") P.C.		
FA10		Ø58.70-0.05	4 HOLES 3/8"UNCx15 (0.59") DEEP		
		(Ø2.311"-0.002")	ON Ø101.6 (Ø4.00") P.C.		

1 80	ı
_	С
₩	Δ,

Drawn HAABI 25-11-19 Title
Checked TAMIL 25-11-19 Title
Approved JOSE 25-11-19 This drawing whole or in a

25-11-19
Title DIMENSIONAL DRAWING, CKA30/60 & CKRA30/60, IB4, 3
CONDUIT ENTRIES, LARGE MOTOR, STANDARD
ORIENTATION.

25-11-19
This of awing and the information it contains are property of Rotork Controls Limit ed, and they will not be reproduced or disdosed, in whole or in part, without the prior written consent of Rotork.

 A4
 Doc Number
 Ver No
 Scale
 Sheet No

 A7B4N0B000X
 1
 NTS
 2 of 2